



AIR CONDITIONING



REFRIGERATION



HEATING



EN

mechanical

CONDENSATE REMOVAL PUMP



Bringing mini pump and peristaltic pump technology together. Simply position the remote reservoir (float switch) in the condensate tray or fix to the drain-pipe connection (depending on chosen reservoir). Alarm option available.



6.5L/h max. flow






12m max. head (flow rate 6.5L/h)

KEY FEATURES

- Float switch operated
- Remote install possible
- Submersible secondary reservoir included


SUITABILITY

- Up to 8.5kW / 29,000Btu/h
- High wall split systems; Ducted units; Floor standing & Chassis units



1.7 kg

MECHANICAL SPECIFICATIONS	
Max. flow	6.5L/h @ 12m head
Max. head	12m
Max. suction lift	3m
Sound level@1m	47dB(A)
Power supply	230V AC 50-60Hz 0.2A
Rated	Continuously
Class	I appliance
Max. unit output	8.5kW / 29,000Btu/h
Max. water temp	40°C / 104°F
Inlet/outlet	6mm ID
IP Protection	IPX1
Safety switch	FP2078 n/a, FP2079 ✓
Thermal protection	✓
Fully potted	n/a
Self priming	✓

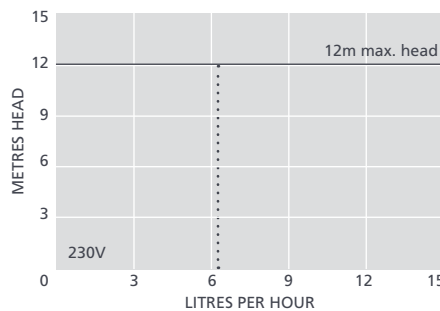

SUGGESTED XTRA ACCESSORIES

Description	Part No.
Peri Spare Tube Kit	FP1282
1 Amp Fuse	FP2620
Tube To Soil Stack Adaptor	FP2038

Xtra For more installation accessories take a look at our Aspen Xtra range

MECHANICAL OPTIONS

Mechanical	FP2078
Mechanical with alarm	FP2079

IN THE BOX

Mechanical pump • 2m Plug & play power cable • Reservoir • Reservoir lid with 3m Float switch cable • Submersible reservoir • Wall mounted bracket • Fixing kit • Install manual

Download manual at aspenspumps.com

View install video at aspenspumps.com



aspenspumps.com

+44 (0)1323 848842

sales@aspenspumps.com

Making life easier for the installer