


# EXCELLENS T STANDARD TRUNKING

## TECHNICAL FEATURES

- RIGID SHOCKPROOF, UVA-PROOF AND RECYCLABLE PVC
- LENGTH 2mt
- ROUNDED BASE AND COVER
- SPRING CENTRAL COUPLING
- PRE-PERFORATED BASE FOR WALL MOUNTING
- PREPARED FOR THE INSERTION OF EASY FLOW, EASY ONE, AQUA SPLIT (DUCT T72 ONLY)

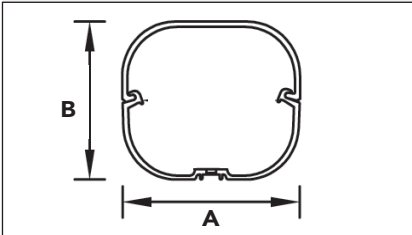

| MODEL       | DIMENSIONS (mm) |    |
|-------------|-----------------|----|
|             | A               | B  |
| T 60 - EXC  | 60              | 52 |
| T 72 - EXC  | 72              | 64 |
| T 100 - EXC | 98              | 73 |


THE BASE IS FIXED TO THE WALL USING THE PRE-MOLDED SLOTS (FIXING KIT IN THE CATALOGUE) THEN THE REFRIGERANT PIPES, THE CONDENSATION PIPE AND THE POWER CABLES ARE INSTALLED.

EVERYTHING IS CONTAINED BY THE **NEW "BLOCK" FIXING SYSTEM**. THE COVER **IS APPLIED QUICKLY AND EFFECTIVELY**, THROUGH A BENDING SYSTEM, **ENSURING INSULATION OF THE CONTENTS FROM WEATHERING**.

THIS IS A **SOLUTION WITH A REMARKABLE AESTHETIC EFFECT EVEN MORE ENHANCED BY THE PERFECTLY GLOSSY APPEARANCE OF THE TRUNKING AND THE ELEGANT ROUNDING THAT ELIMINATES ANY WALL DEFECTS**.

AVAILABLE IN THE VERSIONS: **TOP LINE - NEW LINE - ECO LINE - BROWN LINE - BLACK LINE**

 **MADE IN ITALY**

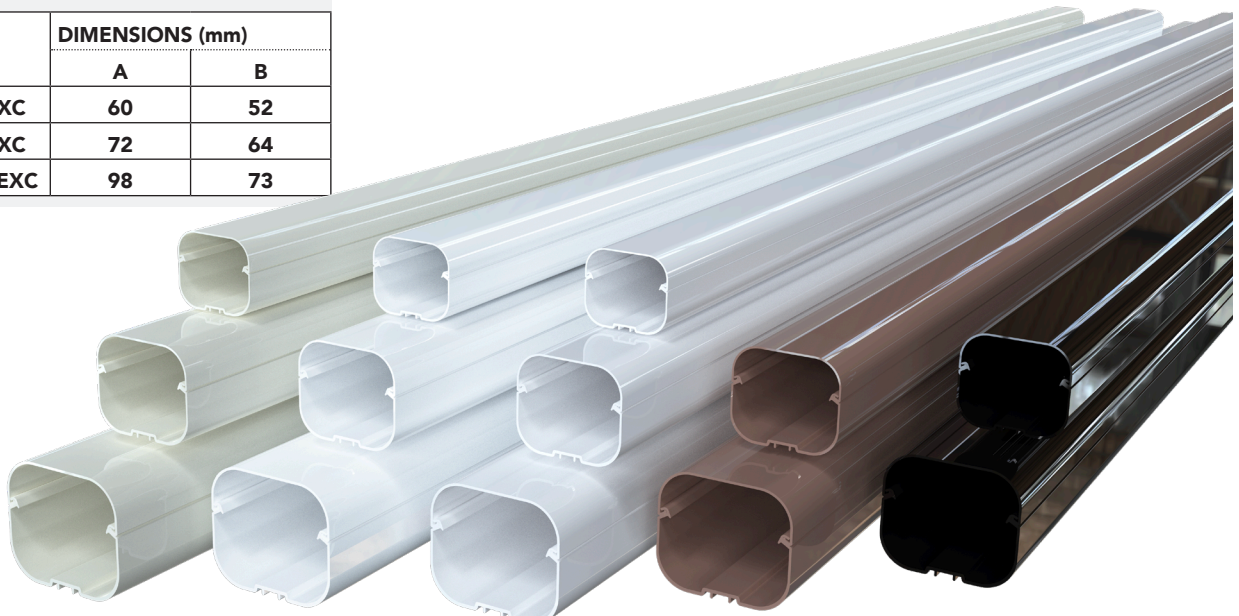

-   
IVORY  
RAL 9002  
TOP LINE
-   
WHITE  
RAL 9010  
NEW LINE
-   
PEARL GREY  
RAL 9003  
ECO LINE
-   
BROWN  
RAL 8017  
BROWN LINE
-   
BLACK  
RAL 9005  
BLACK LINE

## APPLICATIONS

 **DUCT T 60 - EXC**  
Suitable for mono split installation

 **DUCT T 72 - EXC**  
Suitable for mono split and dual split installation

 **DUCT T 100 - EXC**  
Suitable for up to four splits installation

| MODEL       | MIN. QUANTITY  | TOP LINE | NEW LINE  | ECO LINE  | BROWN LINE | BLACK LINE |
|-------------|----------------|----------|-----------|-----------|------------|------------|
|             |                | CODE     | CODE      | CODE      | CODE       | CODE       |
| T 60 - EXC  | 10 PC. = 20 mt | 11120060 | N11120060 | E11120060 | -          | -          |
| T 72 - EXC  | 8 PC. = 16 mt  | 11120072 | N11120072 | E11120072 | SCD100006  | SCD100051  |
| T 100 - EXC | 5 PC. = 10 mt  | 11120010 | N11120010 | E11120010 | SCD100008  | SCD100053  |

**NEW**

**NEW**



# EXCELLENS TP STANDARD TRUNKING WITH PROTECTION FILM

**NEW**

## TECHNICAL FEATURES

- RIGID SHOCKPROOF, UVA-PROOF AND RECYCLABLE PVC
- LENGTH 2mt
- ROUNDED BASE AND COVER
- SPRING CENTRAL COUPLING
- PRE-PERFORATED BASE FOR WALL MOUNTING
- PREPARED FOR THE INSERTION OF EASY FLOW, EASY ONE, AQUA SPLIT (DUCT T72 ONLY)
- COVER WITH BLUE CLEAR PROTECTIVE FILM IN LOW DENSITY POLYETHYLENE

TRUNKING FITTED WITH A PRACTICAL PROTECTION FILM, TO BE REMOVED ONCE THE WORK IS COMPLETED. THE REMOVABLE FILM IS USED TO PROTECT THE TRUNKING DURING INSTALLATION. ONCE THE WORK IS COMPLETED IT WILL BE REMOVED THUS ENSURING CLEANLINESS OF THE TRUNKING IT SELF.

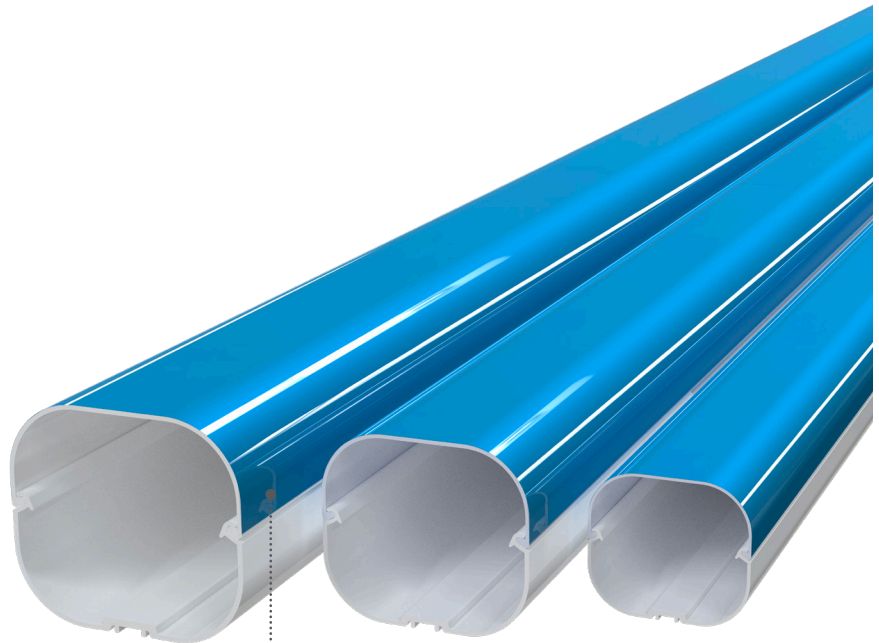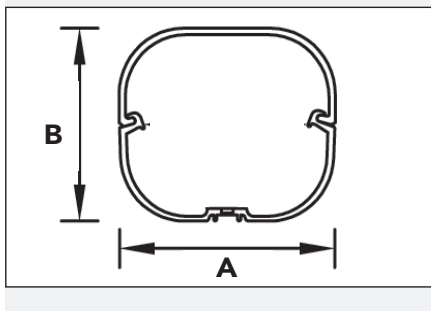


MADE IN ITALY

WITH LOW DENSITY POLYETHYLENE PROTECTION FILM

WHITE RAL 9010 NEW LINE


WITH REMOVABLE FILM






## APPLICATIONS



**T 60 - EXCP TRUNKING**  
Suitable for mono split installation



**T 72 - EXCP TRUNKING**  
Suitable for mono split and dual split installation




**T 100 - EXCP TRUNKING**  
Suitable for up to four splits installation

| MODEL        | CODE      | MIN. QUANTITY  | DIMENSIONS |        |
|--------------|-----------|----------------|------------|--------|
|              |           |                | A (mm)     | B (mm) |
| TP 60 - EXC  | SCD100099 | 10 PC. = 20 mt | 60         | 52     |
| TP 72 - EXC  | SCD100100 | 8 PC. = 16 mt  | 72         | 64     |
| TP 100 - EXC | SCD100101 | 5 PC. = 10 mt  | 98         | 73     |

# EXCELLENS™ WALL COVER

## TECHNICAL FEATURES

- RIGID SHOCKPROOF, UVA-PROOF AND RECYCLABLE PVC
- BASE AND INTERLOCKING COVER
- TRUNKING SUPPORT STOP
- EXTERNAL DOMING TO FACILITATE THE CURVE OF PIPES
- EXTERNAL HOLE COVER CROWN
- HEAT-SHRINK PACKAGING WITH BAR CODE
- GALVANISED SCREWS

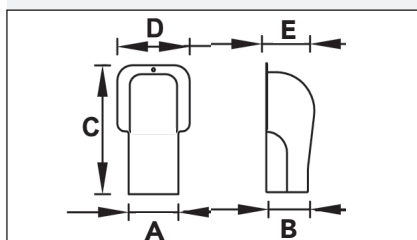

- TOP LINE** IVORY RAL 9002
- NEW LINE** WHITE RAL 9010
- ECO LINE** PEARL GREY RAL 9003
- BROWN LINE** BROWN RAL 8017
- BLACK LINE** BLACK RAL 9005

MADE IN ITALY



| MODEL      | MIN. Q. | DIMENSIONS (mm) |    |     |     |    | TOP LINE | NEW LINE  | ECO LINE  | BROWN LINE | BLACK LINE |
|------------|---------|-----------------|----|-----|-----|----|----------|-----------|-----------|------------|------------|
|            |         | A               | B  | C   | D   | E  | CODE     | CODE      | CODE      | CODE       | CODE       |
| TM 60-EXC  | 5 PC.   | 66              | 56 | 165 | 96  | 68 | 11124160 | N11124160 | E11124160 | -          | -          |
| TM 72-EXC  | 5 PC.   | 78              | 68 | 185 | 108 | 78 | 11124172 | N11124172 | E11124172 | SCD100010  | SCD100055  |
| TM 100-EXC | 3 PC.   | 104             | 78 | 220 | 137 | 92 | 11124110 | N11124110 | E11124110 | SCD100011  | SCD100056  |


**NEW**

**NEW**

# EXCELLENS™ TA CORNER CAP

## TECHNICAL FEATURES

- RIGID SHOCKPROOF, UVA-PROOF AND RECYCLABLE PVC
- BASE AND INTERLOCKING COVER
- TRUNKING SUPPORT STOP
- EXTERNAL HOLE COVER CROWN
- INCLINED PLANE TO FACILITATE THE PASSAGE OF PIPES
- HEAT-SHRINK PACKAGING WITH BAR CODE
- GALVANISED SCREWS

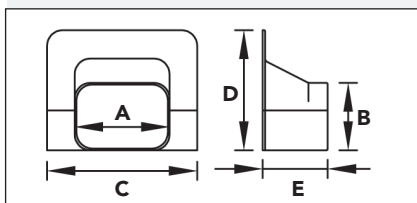

- TOP LINE** IVORY RAL 9002
- NEW LINE** WHITE RAL 9010
- ECO LINE** PEARL GREY RAL 9003
- BROWN LINE** BROWN RAL 8017
- BLACK LINE** BLACK RAL 9005

MADE IN ITALY



| MODEL      | MIN. Q. | DIMENSIONS (mm) |    |     |     |    | TOP LINE | NEW LINE  | ECO LINE  | BROWN LINE | BLACK LINE |
|------------|---------|-----------------|----|-----|-----|----|----------|-----------|-----------|------------|------------|
|            |         | A               | B  | C   | D   | E  | CODE     | CODE      | CODE      | CODE       | CODE       |
| TA 60-EXC  | 5 PC.   | 66              | 56 | 113 | 110 | 60 | 11122110 | N11122110 | E11122110 | -          | -          |
| TA 72-EXC  | 5 PC.   | 78              | 68 | 125 | 114 | 72 | 11122120 | N11122120 | E11122120 | SCD100013  | SCD100058  |
| TA 100-EXC | 3 PC.   | 104             | 78 | 155 | 121 | 83 | 11122130 | N11122130 | E11122130 | SCD100014  | SCD100059  |

**NEW**


**NEW**

# EXCELLENS CP FLAT ELBOW

MADE IN ITALY

## TECHNICAL FEATURES

- RIGID SHOCKPROOF, UVA-PROOF AND RECYCLABLE PVC
- BASE AND INTERLOCKING COVER
- TRUNKING SUPPORT STOP
- WIDE INTERNAL CURVATURE RADIUS
- HEAT-SHRINK PACKAGING WITH BAR CODE
- GALVANISED SCREWS

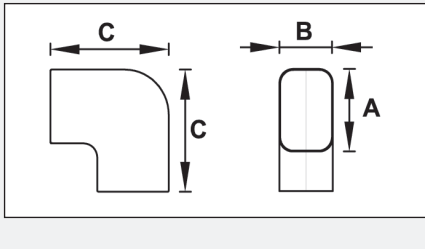

- TOP LINE: IVORY RAL 9002
- NEW LINE: WHITE RAL 9010
- ECO LINE: PEARL GREY RAL 9003
- BROWN LINE: BROWN RAL 8017
- BLACK LINE: BLACK RAL 9005



| MODEL        | MIN. Q. | DIMENSIONS (mm) |    |     | TOP LINE | NEW LINE  | ECO LINE  | BROWN LINE | BLACK LINE |
|--------------|---------|-----------------|----|-----|----------|-----------|-----------|------------|------------|
|              |         | A               | B  | C   | CODE     | CODE      | CODE      | CODE       | CODE       |
| CP 60 - EXC  | 5 PC.   | 66              | 56 | 101 | 11120160 | N11120160 | E11120160 | -          | -          |
| CP 72 - EXC  | 5 PC.   | 78              | 68 | 118 | 11120172 | N11120172 | E11120172 | SCD100016  | SCD100061  |
| CP 100 - EXC | 3 PC.   | 104             | 77 | 152 | 11120100 | N11120100 | E11120100 | SCD100017  | SCD100062  |

NEW


NEW

# EXCELLENS CPS ARTICULATED FLAT ELBOW

MADE IN ITALY

## TECHNICAL FEATURES

- RIGID SHOCKPROOF, UVA-PROOF AND RECYCLABLE PVC
- BASE AND INTERLOCKING COVER
- TRUNKING SUPPORT STOP
- WIDE INTERNAL CURVATURE RADIUS, ADJUSTABLE FROM 90° TO 135°
- UNIVERSAL FOR INTERNAL OR EXTERNAL CURVES
- HEAT-SHRINK PACKAGING WITH BAR CODE
- GALVANISED SCREWS

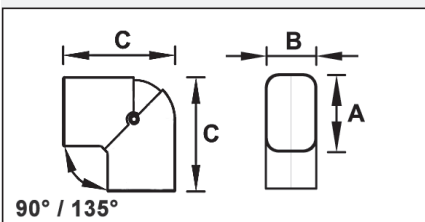

- TOP LINE: IVORY RAL 9002
- NEW LINE: WHITE RAL 9010
- ECO LINE: PEARL GREY RAL 9003
- BROWN LINE: BROWN RAL 8017
- BLACK LINE: BLACK RAL 9005



| MODEL        | DIMENSIONS (mm) |    |     | TOP LINE | NEW LINE  | ECO LINE  | BROWN LINE | BLACK LINE |
|--------------|-----------------|----|-----|----------|-----------|-----------|------------|------------|
|              | A               | B  | C   | CODE     | CODE      | CODE      | CODE       | CODE       |
| CPS 60 - EXC | 66              | 56 | 110 | 11121111 | N11121111 | E11121111 | -          | -          |
| CPS 72 - EXC | 78              | 68 | 130 | 11121110 | N11121110 | E11121110 | SCD100019  | SCD100064  |


NEW

NEW

# EXCELLENS CA ANGLE ELBOW

## TECHNICAL FEATURES

- RIGID SHOCKPROOF, UVA-PROOF AND RECYCLABLE PVC
- BASE AND INTERLOCKING COVER
- TRUNKING SUPPORT STOP
- UNIVERSAL FOR INTERNAL OR EXTERNAL CURVES
- HEAT-SHRINK PACKAGING WITH BAR CODE
- GALVANISED SCREWS

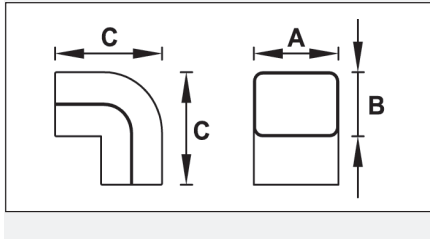

- TOP LINE  IVORY  
RAL 9002
- NEW LINE  WHITE  
RAL 9010
- ECO LINE  PEARL GREY  
RAL 9003
- BROWN LINE  BROWN  
RAL 8017
- BLACK LINE  BLACK  
RAL 9005

 MADE IN ITALY



| MODEL        | MIN. Q. | DIMENSIONS (mm) |    |     | TOP LINE | NEW LINE  | ECO LINE  | BROWN LINE | BLACK LINE |
|--------------|---------|-----------------|----|-----|----------|-----------|-----------|------------|------------|
|              |         | A               | B  | C   | CODE     | CODE      | CODE      | CODE       | CODE       |
| CA 60 - EXC  | 5 PC.   | 66              | 56 | 84  | 11120260 | N11120260 | E11120260 | -          | -          |
| CA 72 - EXC  | 5 PC.   | 78              | 68 | 98  | 11120272 | N11120272 | E11120272 | SCD100021  | SCD100066  |
| CA 100 - EXC | 3 PC.   | 104             | 78 | 113 | 11120210 | N11120210 | E11120210 | SCD100022  | SCD100067  |


**NEW**

**NEW**

# EXCELLENS CAS ARTICULATED ANGLE ELBOW

## TECHNICAL FEATURES

- RIGID SHOCKPROOF, UVA-PROOF AND RECYCLABLE PVC
- BASE AND INTERLOCKING COVER
- TRUNKING SUPPORT STOP
- WIDE CURVATURE RADIUS, ADJUSTABLE FROM 90° TO 135°
- UNIVERSAL FOR INTERNAL OR EXTERNAL CURVES
- HEAT-SHRINK PACKAGING WITH BAR CODE
- GALVANISED SCREWS

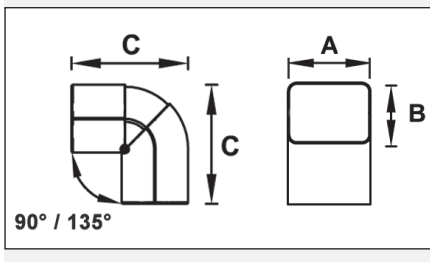

- TOP LINE  IVORY  
RAL 9002
- NEW LINE  WHITE  
RAL 9010
- ECO LINE  PEARL GREY  
RAL 9003
- BROWN LINE  BROWN  
RAL 8017
- BLACK LINE  BLACK  
RAL 9005

 MADE IN ITALY



| MODEL        | DIMENSIONS (mm) |    |     | TOP LINE | NEW LINE  | ECO LINE  | BROWN LINE | BLACK LINE |
|--------------|-----------------|----|-----|----------|-----------|-----------|------------|------------|
|              | A               | B  | C   | CODE     | CODE      | CODE      | CODE       | CODE       |
| CAS 60 - EXC | 66              | 56 | 104 | 11123111 | N11123111 | E11123111 | -          | -          |
| CAS 72 - EXC | 78              | 68 | 120 | 11123110 | N11123110 | E11123110 | SCD100024  | SCD100069  |

**NEW**


**NEW**



# EXCELLENS MG COUPLING

## TECHNICAL FEATURES

- RIGID SHOCKPROOF, UVA-PROOF AND RECYCLABLE PVC
- BASE AND INTERLOCKING COVER
- TRUNKING SUPPORT STOP
- HEAT-SHRINK PACKAGING WITH BAR CODE
- GALVANISED SCREWS

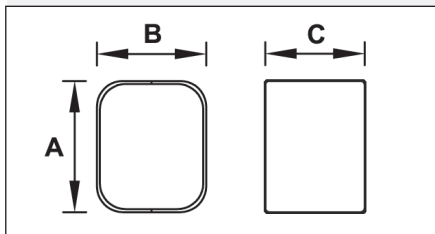

- TOP LINE  
IVORY  
RAL 9002
- NEW LINE  
WHITE  
RAL 9010
- ECO LINE  
PEARL GREY  
RAL 9003
- BROWN LINE  
BROWN  
RAL 8017
- BLACK LINE  
BLACK  
RAL 9005

MADE IN ITALY



| MODEL        | MIN. Q. | DIMENSIONS (mm) |    |    | TOP LINE | NEW LINE  | ECO LINE  | BROWN LINE | BLACK LINE |
|--------------|---------|-----------------|----|----|----------|-----------|-----------|------------|------------|
|              |         | A               | B  | C  | CODE     | CODE      | CODE      | CODE       | CODE       |
| MG 60 - EXC  | 5 PC.   | 66              | 56 | 50 | 11121060 | N11121060 | E11121060 | -          | -          |
| MG 72 - EXC  | 5 PC.   | 78              | 68 | 50 | 11121072 | N11121072 | E11121072 | SCD100026  | SCD100071  |
| MG 100 - EXC | 3 PC.   | 104             | 77 | 50 | 11121100 | N11121100 | E11121100 | SCD100027  | SCD100072  |


NEW

NEW

# EXCELLENS TC END CAP

## TECHNICAL FEATURES

- ECO-FRIENDLY SHOCK AND UVA-RESISTANT PVC
- TRUNKING PROFILE LOCATING RIDGE
- SHRINK-WRAPPED WITH BARCODE
- USED TO CAP DUCTS

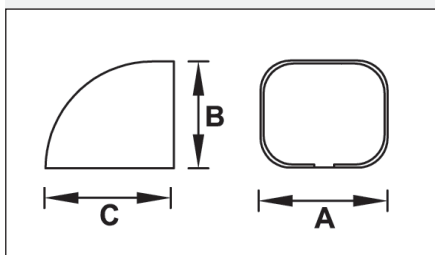

- TOP LINE  
IVORY  
RAL 9002
- NEW LINE  
WHITE  
RAL 9010
- ECO LINE  
PEARL GREY  
RAL 9003
- BROWN LINE  
BROWN  
RAL 8017
- BLACK LINE  
BLACK  
RAL 9005

MADE IN ITALY



| MODEL        | MIN. PACK | DIMENSIONI (mm) |    |     | TOP LINE | NEW LINE  | ECO LINE  | BROWN LINE | BLACK LINE |
|--------------|-----------|-----------------|----|-----|----------|-----------|-----------|------------|------------|
|              |           | A               | B  | C   | CODE     | CODE      | CODE      | CODE       | CODE       |
| TC 60 - EXC  | 5 PCS     | 66              | 56 | 66  | N.D.     | N11122170 | E11122170 |            |            |
| TC 72 - EXC  | 5 PCS     | 78              | 68 | 78  | 11122180 | N11122180 | E11122180 | SCD100038  | SCD100083  |
| TC 100 - EXC | 3 PCS     | 104             | 78 | 104 | 11122190 | N11122190 | E11122190 | SCD100039  | SCD100084  |

NEW


NEW

# EXCELLENS RM WALL ROSETTE

MADE IN ITALY

## TECHNICAL FEATURES

- RIGID SHOCKPROOF, UVA-PROOF AND RECYCLABLE PVC
- EXTERNAL COVER CROWN
- HEAT-SHRINK PACKAGING WITH BAR CODE
- MADE WITH 2 LOCKING PIECES
- ALLOWS THE PASSAGE OF THE PIPES THROUGH WALLS WITH AN EXCELLENT AESTHETIC RESULT

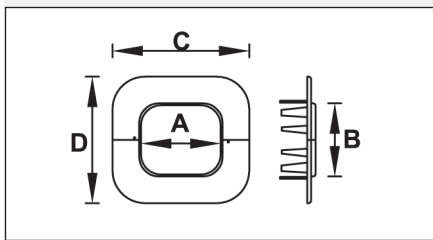

- TOP LINE: IVORY RAL 9002
- NEW LINE: WHITE RAL 9010
- ECO LINE: PEARL GREY RAL 9003
- BROWN LINE: BROWN RAL 8017
- BLACK LINE: BLACK RAL 9005



| MODEL        | MIN. Q. | DIMENSIONS (mm) |    |     |     | TOP LINE | NEW LINE  | ECO LINE  | BROWN LINE | BLACK LINE |
|--------------|---------|-----------------|----|-----|-----|----------|-----------|-----------|------------|------------|
|              |         | A               | B  | C   | D   | CODE     | CODE      | CODE      | CODE       | CODE       |
| RM 60 - EXC  | 5 PC.   | 66              | 56 | 105 | 97  | 11122060 | N11122060 | E11122060 | -          | -          |
| RM 72 - EXC  | 5 PC.   | 78              | 68 | 120 | 112 | 11122072 | N11122072 | E11122072 | SCD100032  | SCD100077  |
| RM 100 - EXC | 3 PC.   | 104             | 78 | 167 | 143 | 11122100 | N11122100 | E11122100 | SCD100033  | SCD100078  |

NEW

NEW


# EXCELLENS TS PIPE OUTLET END SOCKET

MADE IN ITALY



## TECHNICAL FEATURES

- RIGID SHOCKPROOF, UVA-PROOF AND RECYCLABLE PVC
- BASE AND INTERLOCKING COVER
- TRUNKING SUPPORT STOP
- HEAT-SHRINK PACKAGING WITH BAR CODE
- PRE-CUT FOR PIPE NECK
- GALVANISED SCREWS

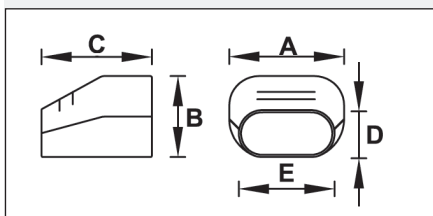

- TOP LINE: IVORY RAL 9002
- NEW LINE: WHITE RAL 9010
- ECO LINE: PEARL GREY RAL 9003
- BROWN LINE: BROWN RAL 8017
- BLACK LINE: BLACK RAL 9005



| MODEL        | MIN. Q. | DIMENSIONS (mm) |    |     |    |    | TOP LINE | NEW LINE  | ECO LINE  | BROWN LINE | BLACK LINE |
|--------------|---------|-----------------|----|-----|----|----|----------|-----------|-----------|------------|------------|
|              |         | A               | B  | C   | D  | E  | CODE     | CODE      | CODE      | CODE       | CODE       |
| TS 60 - EXC  | 5 PC.   | 66              | 56 | 75  | 30 | 60 | 11124060 | N11124060 | E11124060 | -          | -          |
| TS 72 - EXC  | 5 PC.   | 78              | 68 | 90  | 35 | 67 | 11124072 | N11124072 | E11124072 | SCD100035  | SCD100080  |
| TS 100 - EXC | 3 PC.   | 104             | 78 | 110 | 35 | 67 | 11124100 | N11124100 | E11124100 | SCD100036  | SCD100081  |

NEW

NEW

# EXCELLENS DT "T" JOINT


 **MADE IN ITALY**

## TECHNICAL FEATURES

- RIGID SHOCKPROOF PVC, ANTI GRAPE AND RECYCLABLE
- BASE AND INTERLOCKING COVER
- TRUNKING SUPPORT STOP
- WIDE INTERNAL CURVATURE RADIUS
- SEPARATE REDUCTIONS SUPPLIED (FOR MOD. DT60 AND DT72)
- HEAT-SHRINK PACKAGING WITH BAR CODE
- GALVANISED SCREWS

## CHARACTERISTICS

- DT 60 CONSISTING OF: N° 1 "T" 72 E N° 2 REDUCTIONS RC 72/60-EXC
- DT 72 CONSISTING OF: N° 1 "T" 100 E N° 3 REDUCTIONS RC 100/72-EXC
- DT 100 CONSISTING OF: N° 1 "T" 100 WITHOUT REDUCTIONS (SEE P.19)

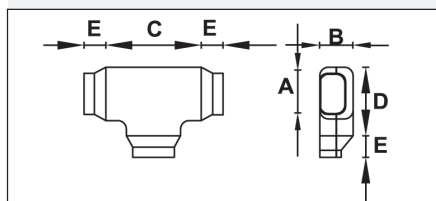

- TOP LINE**  IVORY RAL 9002
- NEW LINE**  WHITE RAL 9010
- ECO LINE**  PEARL GREY RAL 9003
- BROWN LINE**  BROWN RAL 8017
- BLACK LINE**  BLACK RAL 9005



| MODEL        | MIN. Q. | DIMENSIONS (mm) |    |     |     |    | TOP LINE | NEW LINE  | ECO LINE  | BROWN LINE | BLACK LINE |
|--------------|---------|-----------------|----|-----|-----|----|----------|-----------|-----------|------------|------------|
|              |         | A               | B  | C   | D   | E  | CODE     | CODE      | CODE      | CODE       | CODE       |
| DT 60 - EXC  | 3 PC.   | 66              | 56 | 166 | 125 | 38 | 11123060 | N11123060 | E11123060 | -          | -          |
| DT 72 - EXC  | 3 PC.   | 78              | 68 | 200 | 150 | 40 | 11123072 | N11123072 | E11123072 | SCD100041  | SCD100086  |
| DT 100 - EXC | 3 PC.   | 104             | 77 | 200 | 150 | -  | 11123100 | N11123100 | E11123100 | SCD100042  | SCD100087  |

**NEW**

**NEW**